

Extreme Power SPX HI-33 Series

300-1200kVA



Advanced Technology

- ✓ Three level inverter technology
- ✓ Support parallel mode up to 9.6MVA
- ✓ External input/output transformer connection
- ✓ Auxiliary power supply redundancy design

Applications



Industry



Computer room



Data center



Intelligent equipment



Telecom system




Commercial facility



Precision instrument

PRODUCT DATASHEET

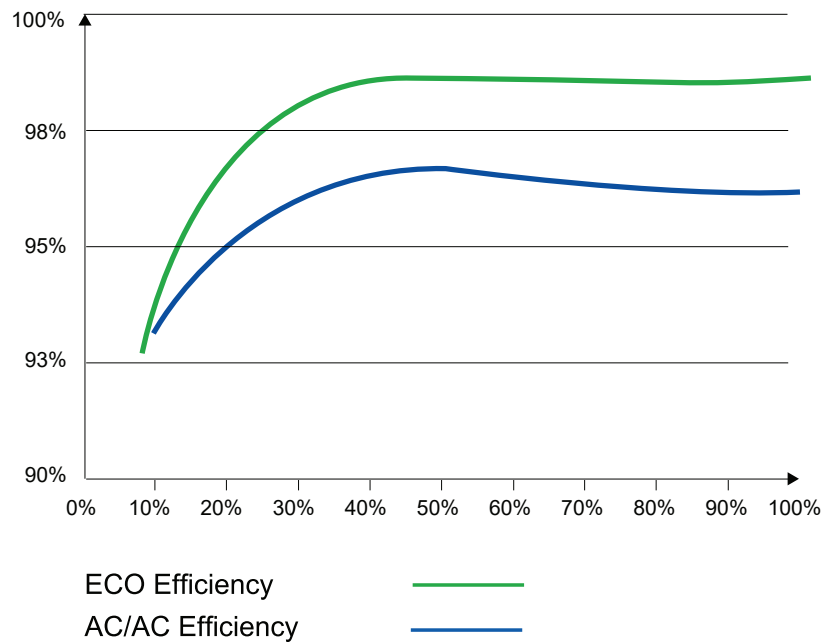

Green Power

- ✓ High AC/AC efficiency up to 97%
- ✓ ECO mode efficiency up to 99%
- ✓ High power factor up to 1
- ✓ Low THDi <3%

Flexible Design

- ✓ Common battery bank sharing in parallel system
- ✓ Multiple communication interface
- ✓ 3-stage battery charging mode
- ✓ Self-load test function without load enables onsite commission
- ✓ Common bypass cabinet
- ✓ External input and output isolation transformer

SPECIFICATIONS

MODEL	SPX33300-HI	SPX33400-HI	SPX33500-HI	SPX33600-HI	SPX33800-HI	SPX331000-HI	SPX331200-HI
INPUT							
Rate Voltage (Vac)	380/400/415						
Voltage Range (Vac)	228-477 (-40%~+25%)						
Phase	3Ph+N+PE						
Frequency Range (Hz)	50/60±10% (±5% settable)						
Power Factor	≥ 0.99						
THDi	<3% (linear load)						
OUTPUT							
Output Voltage (Vac)	380/400/415±1%						
Frequency (Hz)	50/60±0.5%						
THDv	<1% (linear load), <3% (non-linear load)						
PF	0.9 (1.0 optional)						
Max. Efficiency	97%						
Phase	3Ph+N+PE						
Overload	110% load for 60 min, 125% load for 10 min, 150% load for 1 min, above 150% will transfer to bypass after 1s						
BATTERY							
Voltage (Vdc)*	480 (12V battery from 32 to 44 cells settable)				528 (12V battery from 32 to 48 cells settable)		
Charging Current (A)	25-100				25-200		
Common Battery	Yes						
GENERAL							
Communication Interface	RS232, RS485, Dry contact, MODBUS, SNMP (optional)						
Display	7-inch touch screen+LED						
Working Temperature (°C)	-5~40						
Alarm	Input abnormal, battery low-voltage, output overload, UPS failure						
Protection	Short-circuit, overload, over-temperature, battery under voltage, input under voltage						
IP	IP20						
Noise (dB)	<75						
Altitude (m)	1500						
Dimension (W×D×H) (mm)	1000×900×1950		1400×900×1950		1900×900×1950		3000×900×1950
Weight (kg)	750		1100		1450		2400

Specification is subject to change without prior notice.